


M12, female, straight, 4+PE, M12, male, straight, 4+PE, sensor/actuator cable

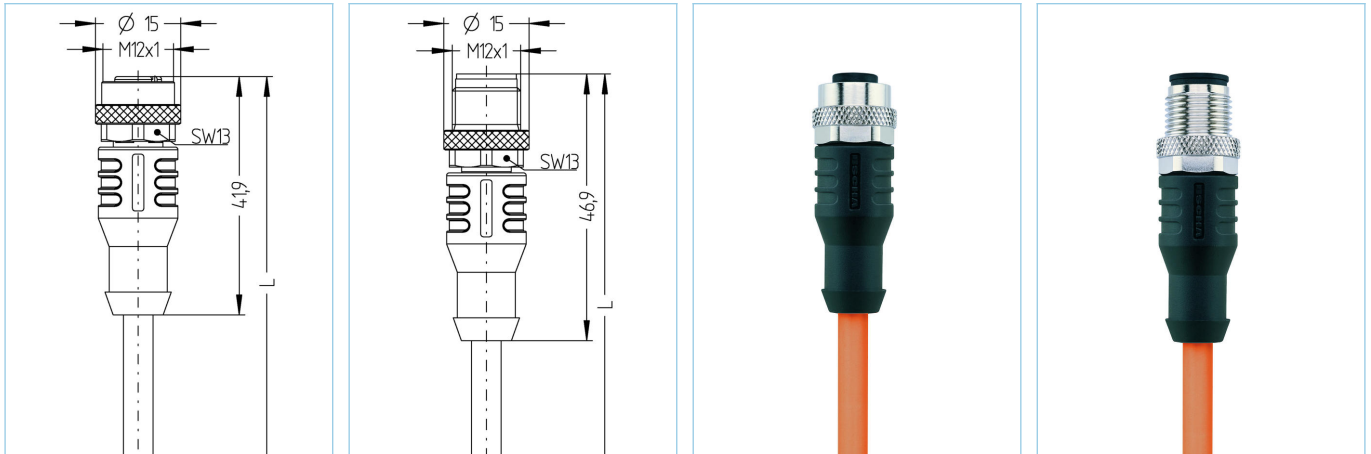

**Product data**

|                    |                         |
|--------------------|-------------------------|
| Item description   | AL-WAK5-m-AL-WAS5/S7400 |
| Item-No.           | V0004928                |
| Länge              | on demand               |
| Customs tariff-No. | 85444290                |
| Step-File          | AL-WAK5_AL-WAS5.stp     |

**Technical data**

|                                | A-side                         | B-side                         |
|--------------------------------|--------------------------------|--------------------------------|
| Connector                      | female, straight, M12          | male, straight, M12            |
| Number of pins                 | 4+PE                           | 4+PE                           |
| Pin assignment                 | 1 BN, 2 WH, 3 BU, 4 BK, 5 GNYE | 1 BN, 2 WH, 3 BU, 4 BK, 5 GNYE |
| Coding of                      | A                              | A                              |
| Rated voltage                  | 60V                            | 60V                            |
| Current load (at 40°C)         | 4A                             | 4A                             |
| Insulation resistance          | $\geq 10^9 \Omega$             | $\geq 10^9 \Omega$             |
| Resistance                     | $\leq 5 m\Omega$               | $\leq 5 m\Omega$               |
| Ambient temperature product    | -30°C...+90°C                  | -30°C...+90°C                  |
| Contact material               | Metal, CuSn, gold-plated       | Metal, CuSn, gold-plated       |
| Contact-carrier material       | Plastic, TPU, BK               | Plastic, TPU, BK               |
| Grip body material             | Plastic, TPU, BK               | Plastic, TPU, BK               |
| Coupling nut material          | Metal, CuZn, nickel-plated     | Metal, CuZn, nickel-plated     |
| Sealing (female) material      | FPM/FKM                        |                                |
| Standards                      | IEC 61076-2-101                | IEC 61076-2-101                |
| Degree of protection (mounted) | IP65, IP67, IP68               | IP65, IP67, IP68               |
| Mechanical life-cycle          | >100 mating cycles             | >100 mating cycles             |
| Degree of pollution            | 3                              | 3                              |

|                  |                                |
|------------------|--------------------------------|
| <b>Cable web</b> | <b>PUR, UL, S7400, robotic</b> |
|------------------|--------------------------------|

Flexible, silicone- and halogen free control cable with high mechanical strength. Due to its outstanding properties in drag-chain adaption, torsionresistance and weld-field immunity, it is very well suited for the flexible applications in robotics, handling- and assembly technology as well as machine tools. The cable meets the UL and CSA (UL10493/20549; cULus) requirements.

|                                |  |
|--------------------------------|--|
| Outer diameter of jacket       | 5.60 mm  |
| Cable-jacket material          | PUR  |
| Jacket color                   | OG, similar RAL2003  |
| Wire cross-section             | 5 x 0.34 mm <sup>2</sup>   |
| Wire insulation material       | PP   |
| Wire colors                    | BN, WH, BU, BK, GNYE   |
| Wire structure                 | 42 x 0.10 mm   |
| Bending radius (fixed)         | 5 x Ø-cable  |
| Bending radius (repeated)      | 10 x Ø-cable   |
| Temperature range (repeated)   | -30°C...+90°C  |
| Temperature range (fixed)      | -40°C...+90°C  |
| Temperature range (drag chain) | -25°C...+60°C  |
| Drag chain-application         | ≥ 10 Mio. cycles   |
| Halogen-free                   | Yes  |
| Torsion                        | +/-360°/m, ≥ 10 Mio. cycles  |
| Rated voltage cable            | ≤300 V   |
| Special features               | flame retardant, halogen free, hydrolysis proof, LABS free, oil resistant, ozone resistant, recyclable, RoHs compliant, acid- and alkali resistant, drag chain-adapted, welding sparks resistant, seawater resistant, silicone free, torsion resistant, UV resistant |

|                       |  |
|-----------------------|--|
| <b>Classification</b> |  |
|-----------------------|--|

|            |          |
|------------|----------|
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |
| ETIM 5.0   | EC001855 |
| ETIM 6.0   | EC001855 |

|                    |
|--------------------|
| <b>Accessories</b> |
|--------------------|

Mounting-clip, M12  
<https://www.escha.net/en/products/standard/accessories-for-connectivity/8047660>

Torque-wrench set  
<https://www.escha.net/en/products/standard/accessories-for-connectivity/8055431>

Marking rings Ø 9mm  
<https://www.escha.net/en/products/standard/accessories-for-connectivity?p=1&o=3&n=15&f=809>

Screw plug, M12  
<https://www.escha.net/en/products/standard/accessories-for-connectivity?p=1&o=3&n=15&f=812>

Screw cap, M12  
<https://www.escha.net/en/products/standard/accessories-for-connectivity?p=1&o=3&n=15&f=811>